


Power Supply AMFLO® MAG Smart




Verkabelung / wiring / câblage

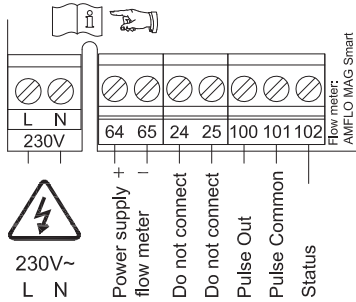

Power Supply AMFLO® MAG Smart (ID 94801) / CALEC® ST LON

64	brown / braun / brun	+ Power	10	yellow / gelb / jaune	Pulse Out
65	blue / blau / bleu	- Power	11	green / grün / vert	Pulse Out Common
100	yellow / gelb / jaune	Pulse Out	102	pink / rosa / rose	Status
101	green / grün / vert	Pulse Out Common			
102	pink / rosa / rose	Status			

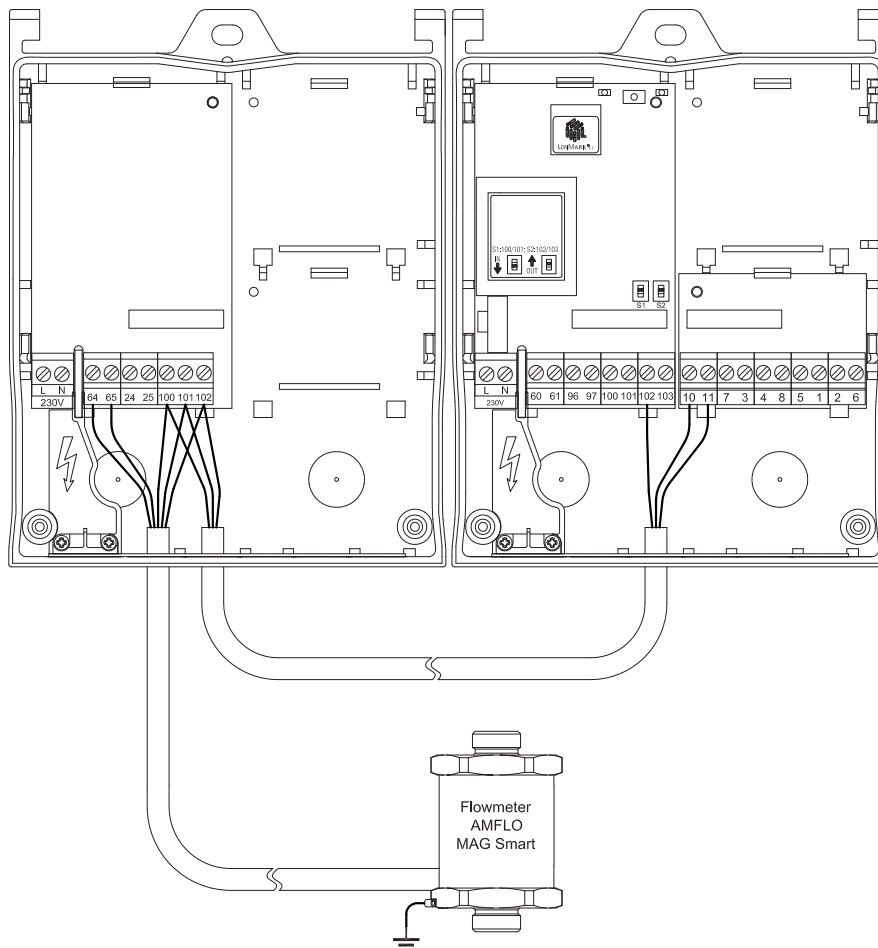

Technische Daten / Technical data / Spécifications techniques

Eingang / Input / entrées 230-240 V, 50-60 Hz (L / N)
Ausgang / Output / sortie 24 V DC, max. 175 mA (64 / 65)



Weitere Informationen siehe: Montage- und Bedienungsanleitung CALEC® ST und AMFLO® MAG Smart.
Further information see: Mounting and operating instruction CALEC® ST and AMFLO® MAG Smart.
Pour plus informations voir: Instructions de montage et mode d'emploi CALEC® ST et AMFLO® MAG Smart.

AQUAMETRO AG

Ringstrasse 75
CH-4106 Therwil
Tel. +41 61 725 11 22
Fax +41 61 725 15 95
info@aquametro.com

AQUAMETRO SA

Rue du Jura 10
CH-1800 Vevey
Tel. +41 21 926 77 77
Fax +41 21 926 77 78
info.vevey@aquametro.com

AQUAMETRO MESSTECHNIK GmbH

Zum Panrepel 24
D-28307 Bremen
Tel. +49 421 871 64 0
Fax +49 421 871 64 19
info.amd@aquametro.com

AQUAMETRO BELGIUM SPRL

Dallaan, 67
B-1933 Sterrebeek
Tel. +32 2 241 62 01
Fax +32 2 216 22 63
info.amb@aquametro.com



www.aquametro.com