


# Power Supply AMFLO® MAG Smart




## Verkabelung / wiring / câblage

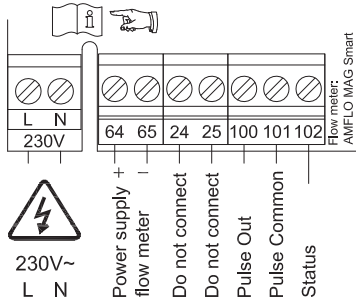

## Power Supply AMFLO® MAG Smart (ID 94801) / CALEC® ST LON

64	brown / braun / brun	+ Power	10	yellow / gelb / jaune	Pulse Out
65	blue / blau / bleu	- Power	11	green / grün / vert	Pulse Out Common
100	yellow / gelb / jaune	Pulse Out	102	pink / rosa / rose	Status
101	green / grün / vert	Pulse Out Common			
102	pink / rosa / rose	Status			

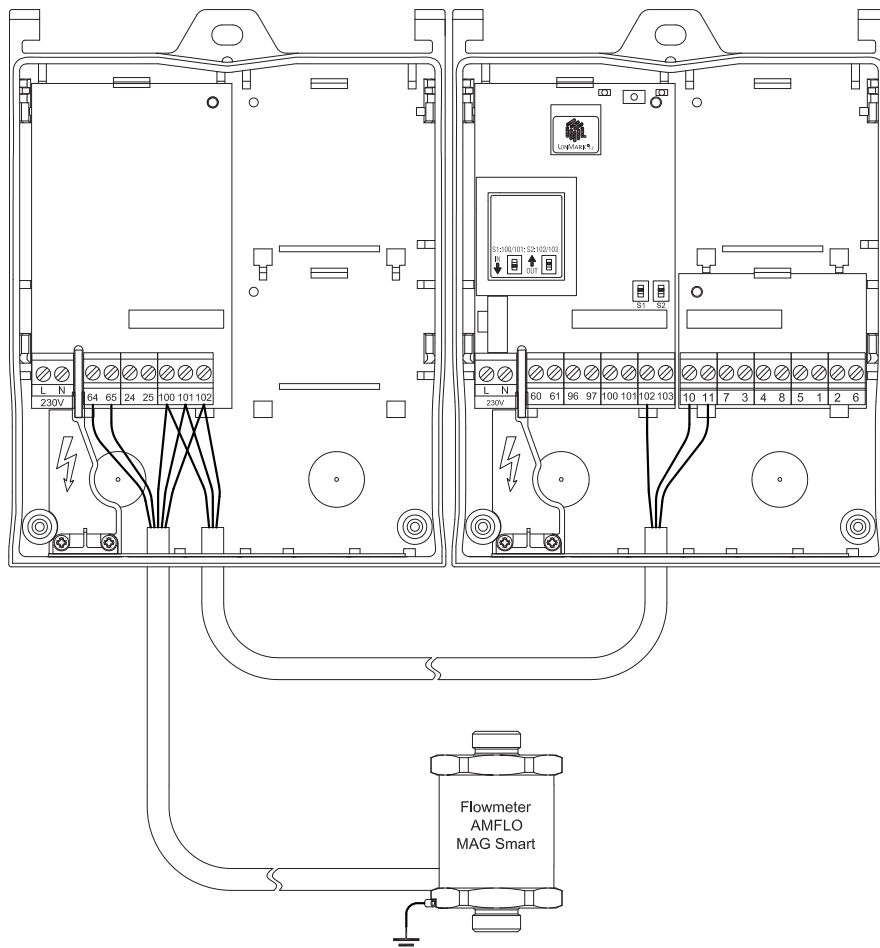

# Technische Daten / Technical data / Spécifications techniques

Eingang / Input / entrées 230-240 V, 50-60 Hz (L / N)  
Ausgang / Output / sortie 24 V DC, max. 175 mA (64 / 65)



Weitere Informationen siehe: Montage- und Bedienungsanleitung CALEC® ST und AMFLO® MAG Smart.  
Further information see: Mounting and operating instruction CALEC® ST and AMFLO® MAG Smart.  
Pour plus informations voir: Instructions de montage et mode d'emploi CALEC® ST et AMFLO® MAG Smart.

## AQUAMETRO AG

Ringstrasse 75  
CH-4106 Therwil  
Tel. +41 61 725 11 22  
Fax +41 61 725 15 95  
info@aquametro.com

## AQUAMETRO SA

Rue du Jura 10  
CH-1800 Vevey  
Tel. +41 21 926 77 77  
Fax +41 21 926 77 78  
info.vevey@aquametro.com

## AQUAMETRO MESSTECHNIK GmbH

Zum Panrepel 24  
D-28307 Bremen  
Tel. +49 421 871 64 0  
Fax +49 421 871 64 19  
info.amd@aquametro.com

## AQUAMETRO BELGIUM SPRL

Dallaan, 67  
B-1933 Sterrebeek  
Tel. +32 2 241 62 01  
Fax +32 2 216 22 63  
info.amb@aquametro.com



www.aquametro.com