
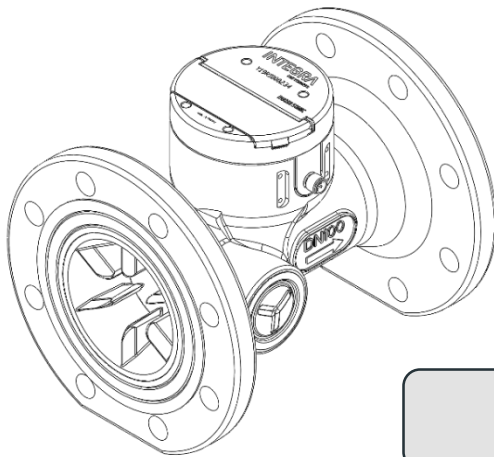
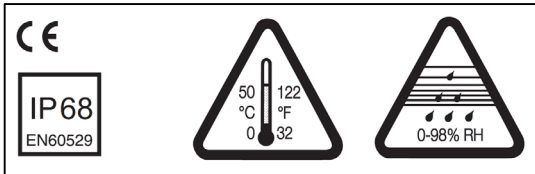


RUBIN[®] SONIC


Ultrasonic water meter
 Ultraschall-Wasserzähler
 Compteur d'eau à ultrasons
 Contatore d'acqua ad ultrasuoni

Installation guide
 Montageanleitung
 Instructions de montage
 Istruzioni di montaggio

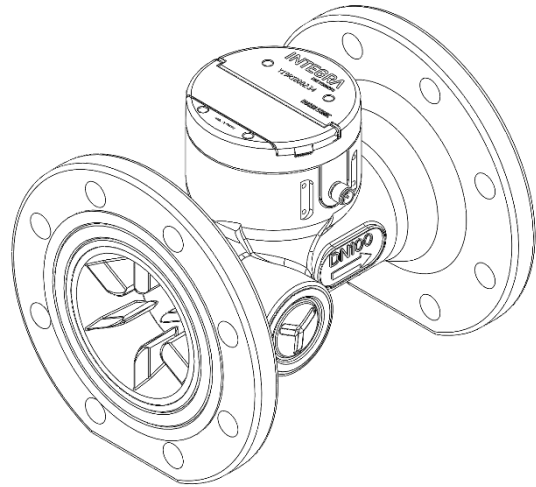

RSO

1 YEAR
storage max.




max.
+70°C
+338°F




min.
-20°C
-4°F





2 weeks of storage
max. at T>35°C / 95°F

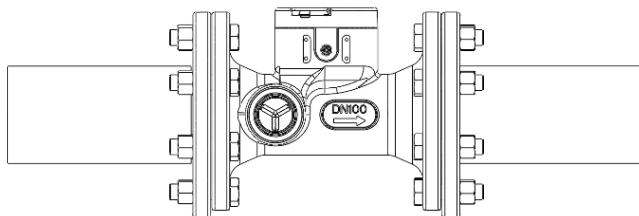

Torque: min. 30 N.m, max. 50 N.m

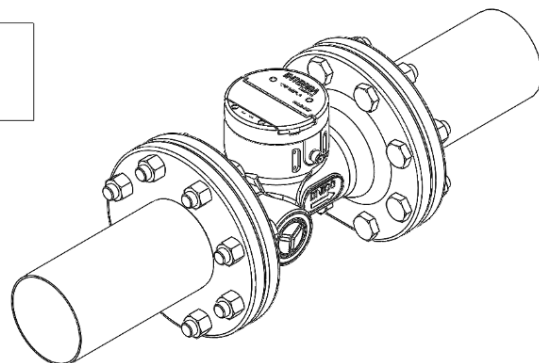


i

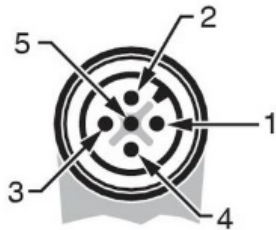
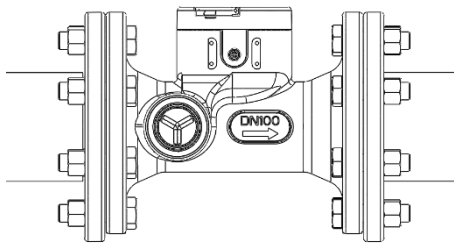







Male

Pin	Color on cable	Output
1	Brown	Vext
2	White	Volume
3	Blue	Common/GND
4	Black	Flow direction
5	Grey or Yellow/Green	Tamper/ Loop detection
Pulse Output		
V user		3.48 V
Maximum current sink		50 mA
Pulse weight		1 L to 10 m3
Open impedance		R > 1 MOhm (V < 5V)
Closed impedance		200 Ohm
Pulse output supplied with a 1,5 m long cable		

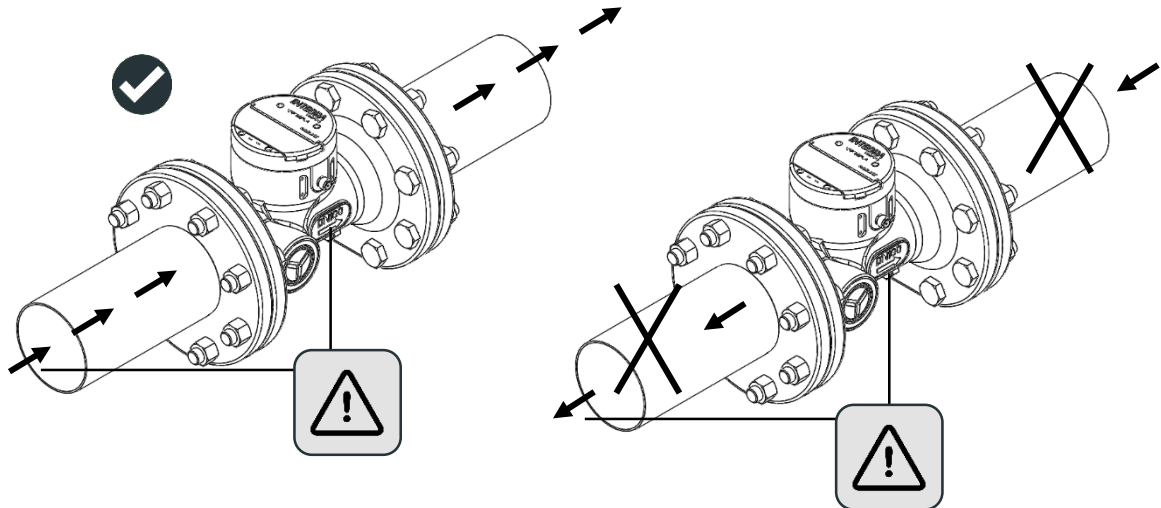

PROG

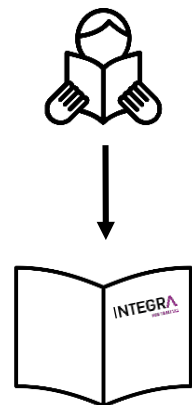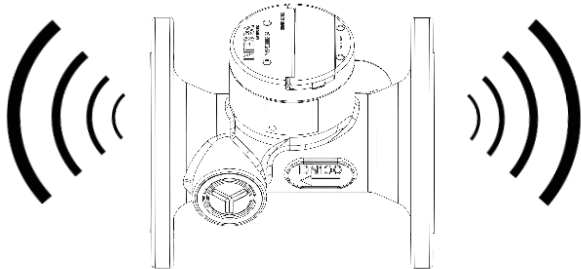

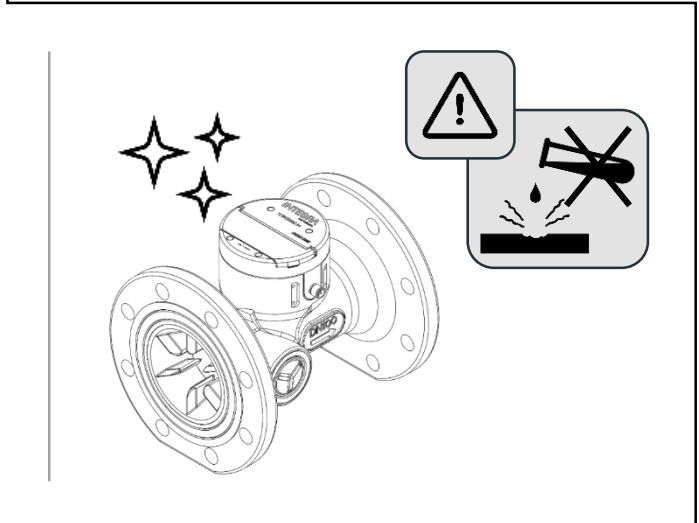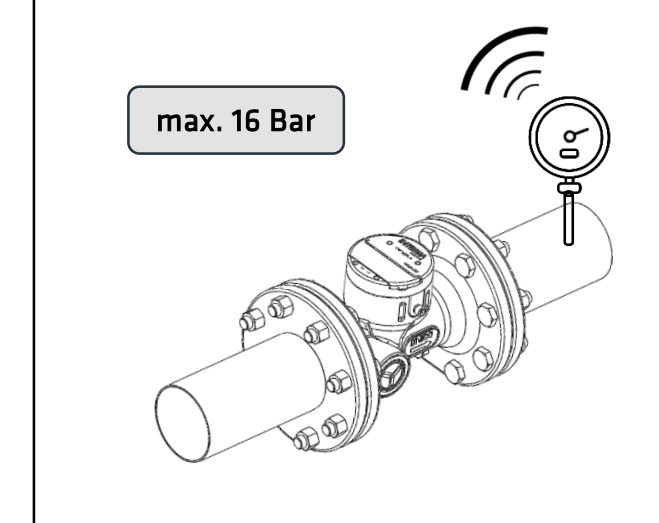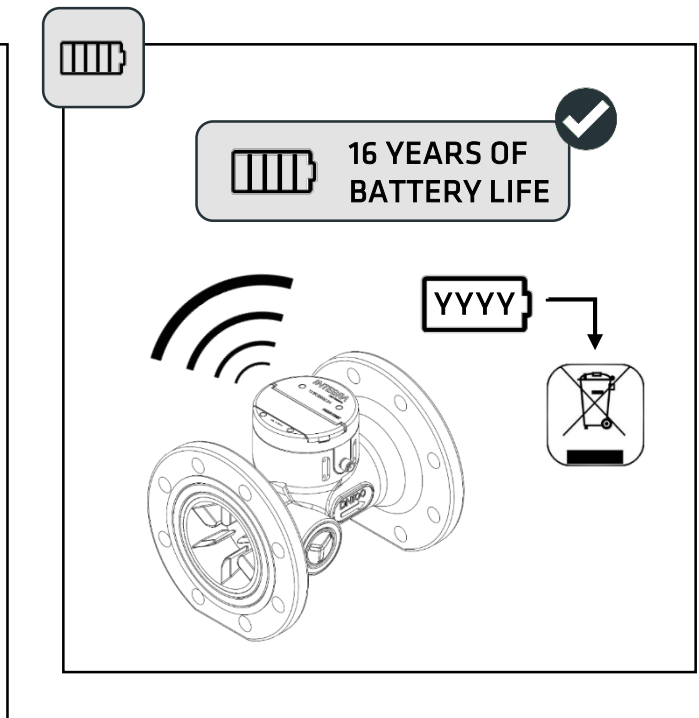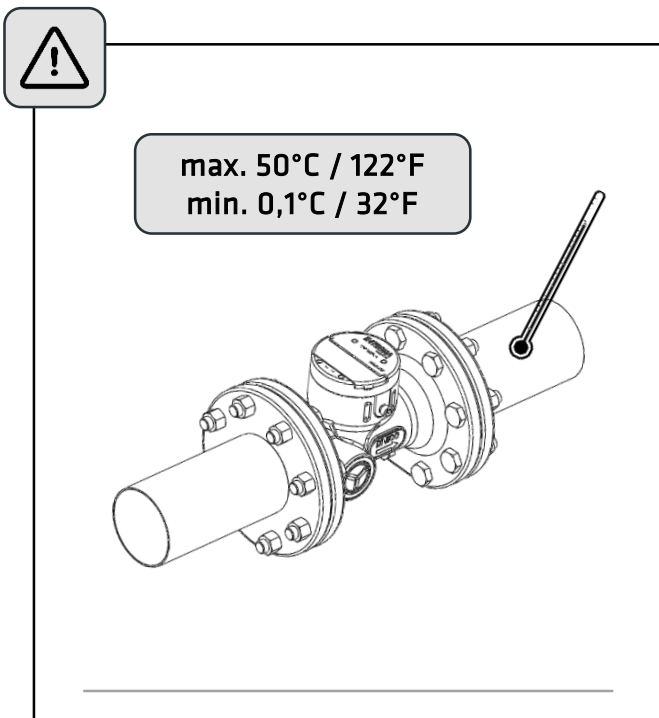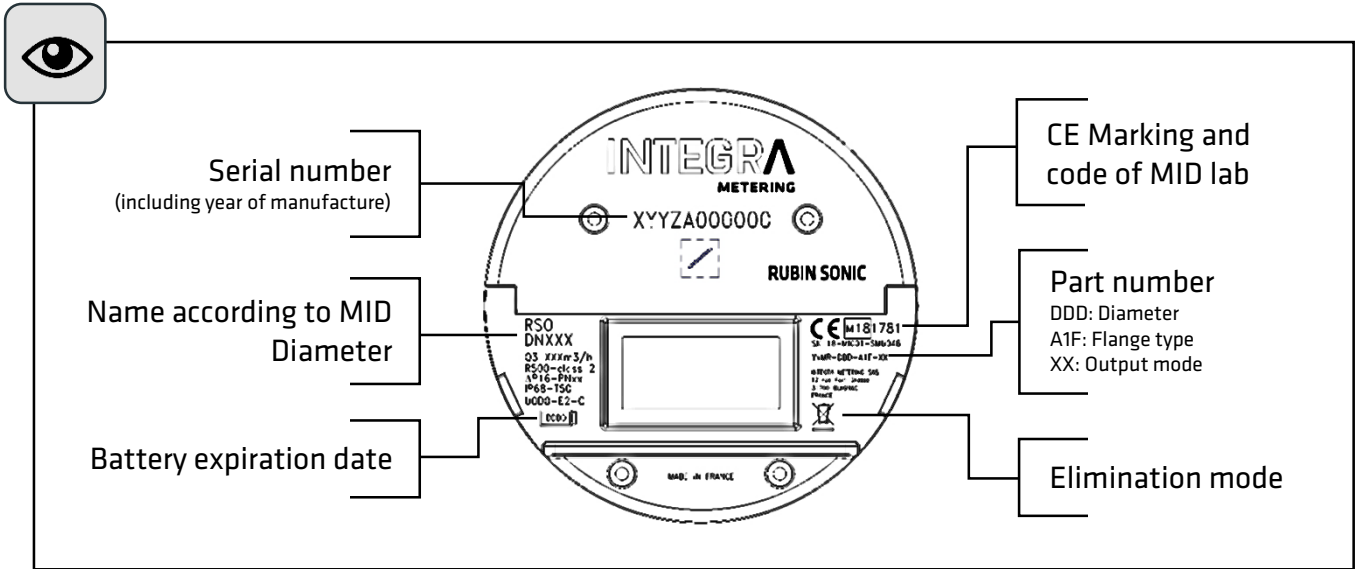

i → www.integra-metering.com

INTEGRA Metering AG
Ringstrasse 75, CH-4106 Therwil
Tel. +41 61 725 11 22

INTEGRA

METERING

Scan the QR code below to view the EU Declaration of Conformity (DoC):

